

The KYTOLA® Variable Area Flow Meter Model KL is a reliable instrument for measuring and monitoring of medium range flows of liquids and gases.



- For liquid or gas
- Large selection of materials
- Without flow adjustment valve
- Scales up to 27.5 USGPM (H₂O) or 120 SCFM (Air)
- Connections NPT or G 1"

ISO 9001 ISO 14001

FLOW METER KL

FEATURES

Sturdy construction with protected flow tube

Stainless steel side plates

TYPICAL APPLICATIONS

Sealing water measurements for vacuum pumps

Lubrication oil measurements

Gas flow measurements

Flush water applications

OPTIONS

Scales for alternative liquids and gases

PES flow tube

Viton® or EPDM seals

Low and/or high flow alarm

Model	KLA	KLH	KLK
End blocks	Aluminium	AISI 316	Nylon
Max. pressure	440 psi (30 bar)	440 psi (30 bar)	290 psi (20 bar)
Max. temperature	175°F(80°C),*248°F(120°C)	175°F(80°C),*248°F(120°C)	175°F(80°C)
Weight	4.2 lbs (1.9 kg)	6.8 lbs (3.1 kg)	3.1 lbs (1.4 kg)
Valve housing	Aluminium	AISI 316	AISI 316
Side plates	AISI 316		
Flow tube	Grilamid (PA-12) (*PES)		
Connections	NPT 1" or G 1"		
Float	AISI 329 Note! Other possible wetted metal parts: AISI 316		
Seals	Nitrile (*Viton®, EPDM)		
Accuracy	±5% F.S. H ₂ O, 70°F (+20°C)		

*Special construction on request

KL - -


End Block Material				
Aluminium (not for H ₂ O)				A
AISI 316				H
Nylon				K

Flow Range				
H ₂ O USGPM	H ₂ O L/min	Air SCFM	Air NL/min	
2-11	7.5-40	7.5-45	200-1200	4A
2.5-15	10-55	10-60	200-1500	4B
2.5-17	10-65	10-65	300-1800	4C
4-22	10-85	10-85	400-2200	4D
2.5-27.5	10-120	20-120	400-3000	4E

Scale		
H ₂ O L/min (20°C)		A
H ₂ O USGPM (70°F)		G
Air NL/min (20°C/1.013 bar abs)		R
Air SCFM (70°F/14.7 psia)		T
Relative scale 0 - 10		D

Features		
Alarm readiness		D
G connections	<i>blank</i>	
NPT connections		N
Grilamid flow tube, nitrile seals	<i>blank</i>	
PES flow tube, nitrile seals		V
PES flow tube, Viton® seals		W
Grilamid flow tube, Viton® seals		X
EPDM seals		Y

Standard feature: leave *blank*
Special feature: choose character

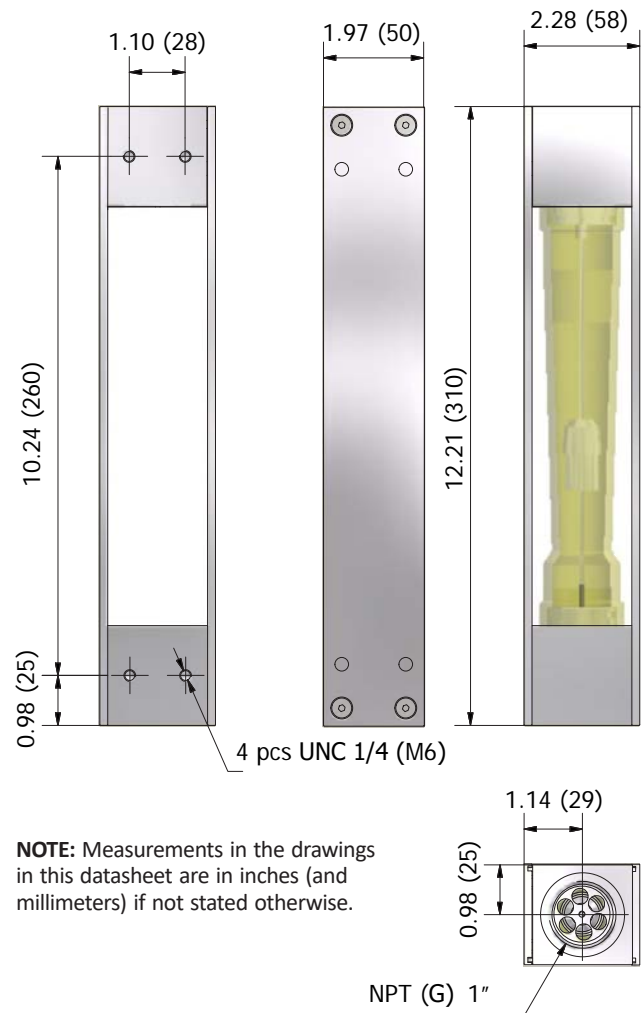

Copyright© Kytola Instruments Oy 2021. Dimensions and measurements are given within normal tolerances. Manufacturer reserves the right to changes without prior notification. File KL_es14NA_en Published 12/2022.