

MEASURING STATION OVAL D2

- Communication with upper level systems
- In excess of 100 measuring stations and thousands of measuring points in one serial line
- Modbus RTU or Kytola KVM protocol
- Serial interface RS485/RS422
- USB port for local configuration
- Measuring units:
L/min, pulses/min, PPM or USGPM
- Kytola coil or NAMUR sensor

The OVAL D2 measuring station operates as an independent station, or it can be connected to Kytola KVM Control monitoring application or to customer's PLC or DCS via Modbus RTU protocol.

Painted or stainless steel enclosure,
IP 65

Local display and keyboard

Alarm relays, inhibits, and groups

Lubrication oil flow monitoring

Industrial flow monitoring

Process control

OVAL D2

TECHNICAL DATA

Model

OVAL D2

Enclosure	Painted steel (*stainless steel AISI 316), IP65
Supply voltage	24 VDC \pm 25% / 0.6 A or 110–240 VAC / 50–60Hz
Ambient temperature	–20°C...+60°C (relative humidity < 85%, non-condensing)
Display	4 x 20 characters and 4 pushbuttons
Communication	Modbus RTU or Kytola KVM protocol (RS485/RS422)
Measuring points / station	Max. 64 points with Modbus RTU protocol or max. 48 points with Kytola KVM protocol
Alarm relays	3 potential-free relays for high-flow, low-flow, and very-low-flow alarms + 1 programmable relay
Alarm inhibition inputs	3 optoisolated inputs to prevent alarms
Sensor types	Kytola coil or NAMUR sensor; EN 60947
Weight	6.2 kg *On special request

OVAL D2- ■ - ■ - ■

Number of Measuring Points

16	16
32	32
48	48
64	64

Power Supply

24 VDC \pm 25% / 0.6A (standard, leave blank)
110–240 VAC / 50–60 Hz

P


Enclosure

Painted steel (standard, leave blank)
Stainless steel AISI 316

H



OVAL FLOW panel with OVAL D2
and SR6 meters

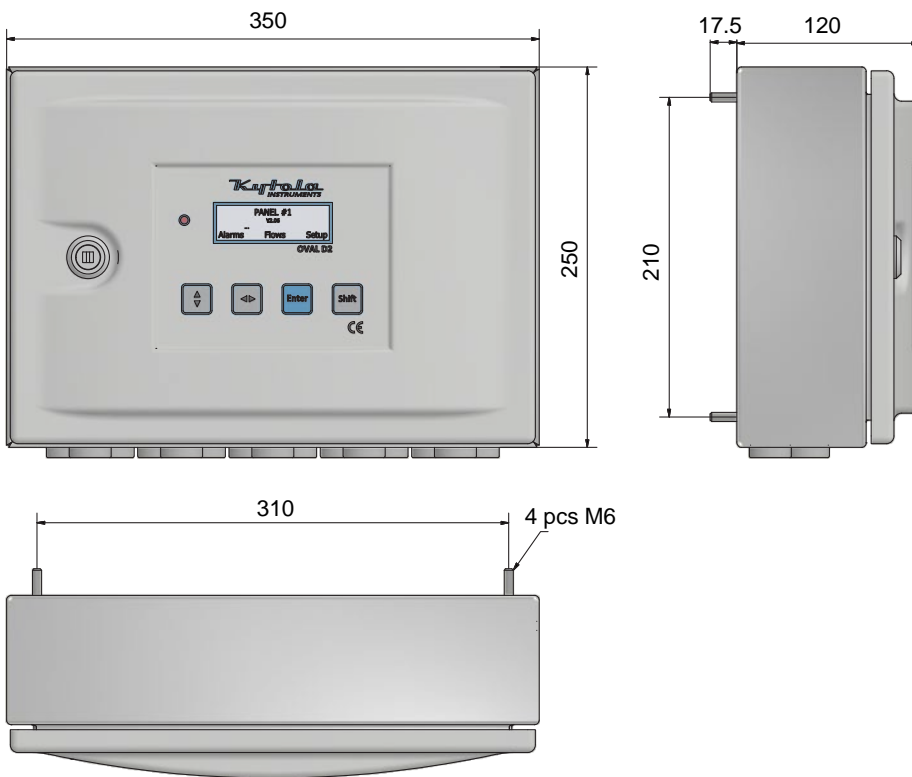

Kytola
INSTRUMENTS

www.kytola.com



Kytola Instruments Oy
Olli Kytölän tie 1
FI-40950 Muurame, Finland
Tel. +358 20 779 0690
info@kytola.com